

Complete Home
Filtration

AUSTRALIA'S **MOST TRUSTED**
WHOLE HOME FILTRATION

Over 500 5-star reviews



#betterwater from every tap



Proudly 100%
**WEST AUSTRALIAN
OWNED & OPERATED**



15" SYSTEM

Width: 800mm / Depth: 235mm / Height: 600mm
Operating Pressure: 29PSI (2Bar) - 87PSI (6Bar)
Operating Temp: 4-55°C / Max Flow Rate 32/48 Lpm
Weight 23kgs
Must be installed by a licenced plumber

10" SYSTEM



Pressure drop of less than 5%



EXCLUSIVE TECHNOLOGY




NEVER PAY FOR BOTTLED WATER AGAIN



ADD VALUE TO YOUR PROPERTY



DIMENSIONS/NOTES FOR BUILDER


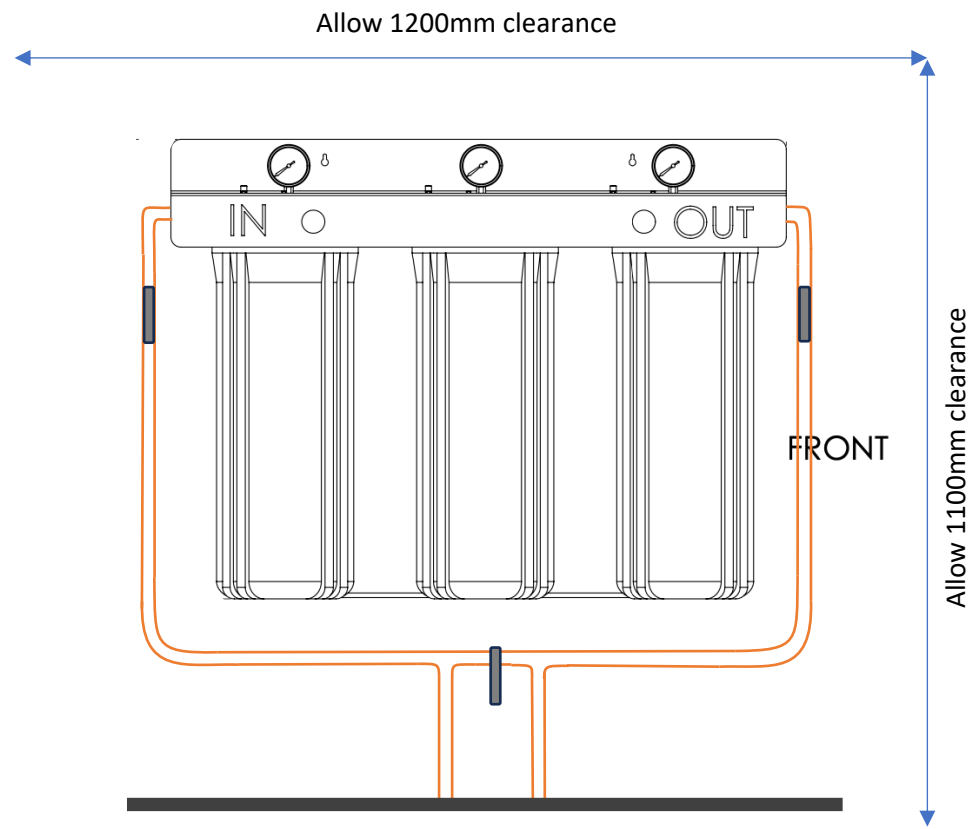


- Water runs from left to right through the system
- **Width 800mm:** allow up to 1200mm for front cover removal (screws on sides)
- **Height 600mm:** allow 1100mm; 300mm for bypass valve below and 200mm on top for cover removal
- **Depth 235mm – NOTE:** front cover removal required for filter changes
- **Weight 23kgs** (without water): noggins required if mounting on wall which is not brick (or similar)
- **Freestanding:** Unit will be installed on a stand, ensure no concrete poured prior to installation of unit
- **Pipe size:** unit installed with standard 20mm pipe, if 25mm pipe required speak with your CHF representative
- **Distance:** Provisions to be minimum 1m from water meter, or 1.5m if a retic T Junction is needed. System must be installed beyond reticulation.


PROVISION REQUIREMENTS BY BUILDER

Whole Home Filtration must be installed on the mains, before the first T-off into the home and beyond the retic T-junction.
Builder to provide a 200mm exposed loop in 20mm copper pipe at desired installation location.


OUTSIDE INSTALLATION

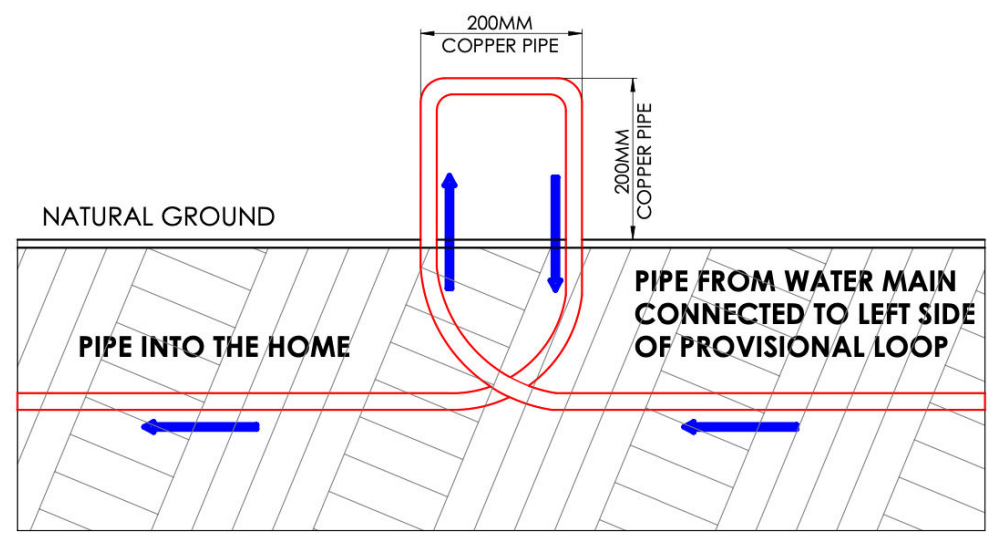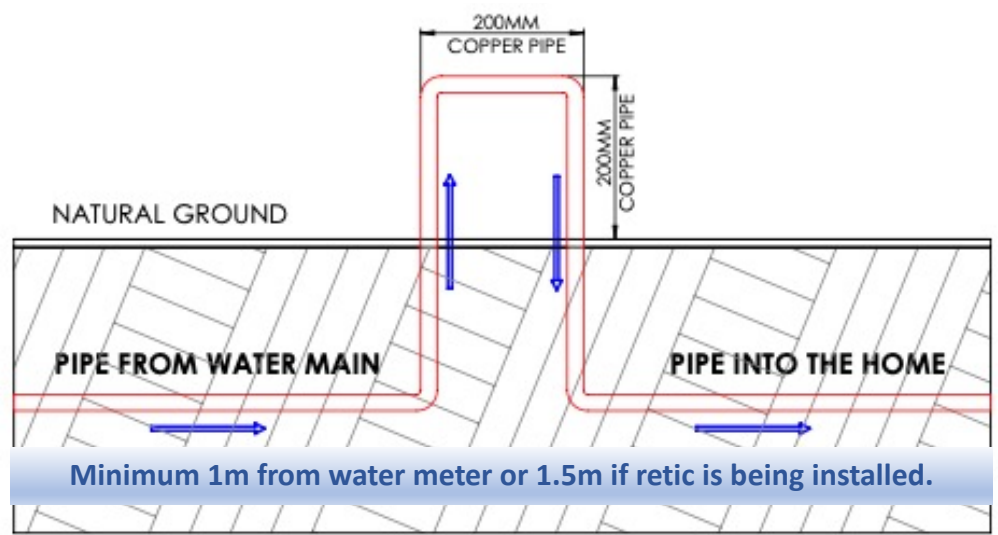

INSIDE GARAGE WALL INSTALLATION

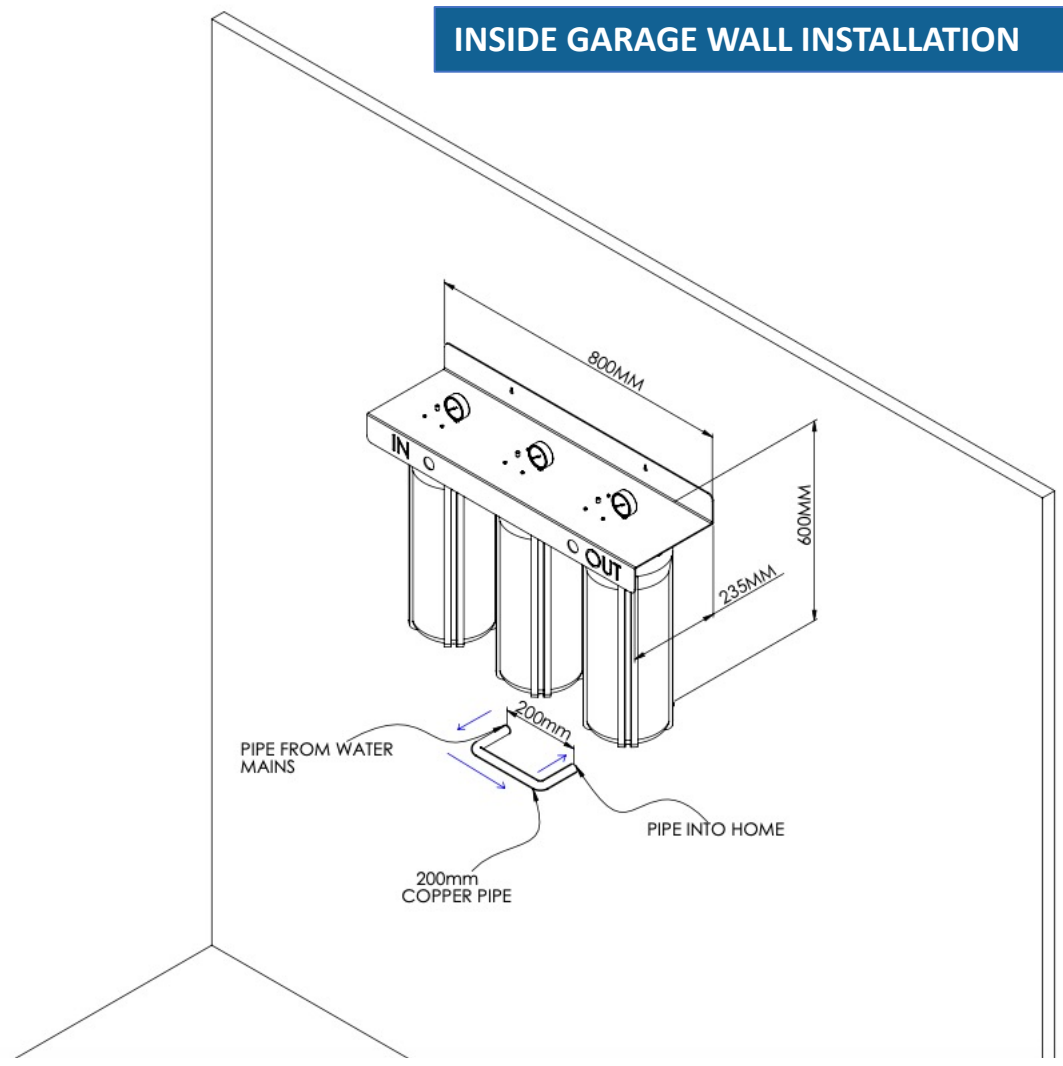

LIGHTWEIGHT WALL NOGGIN REQUIREMENTS

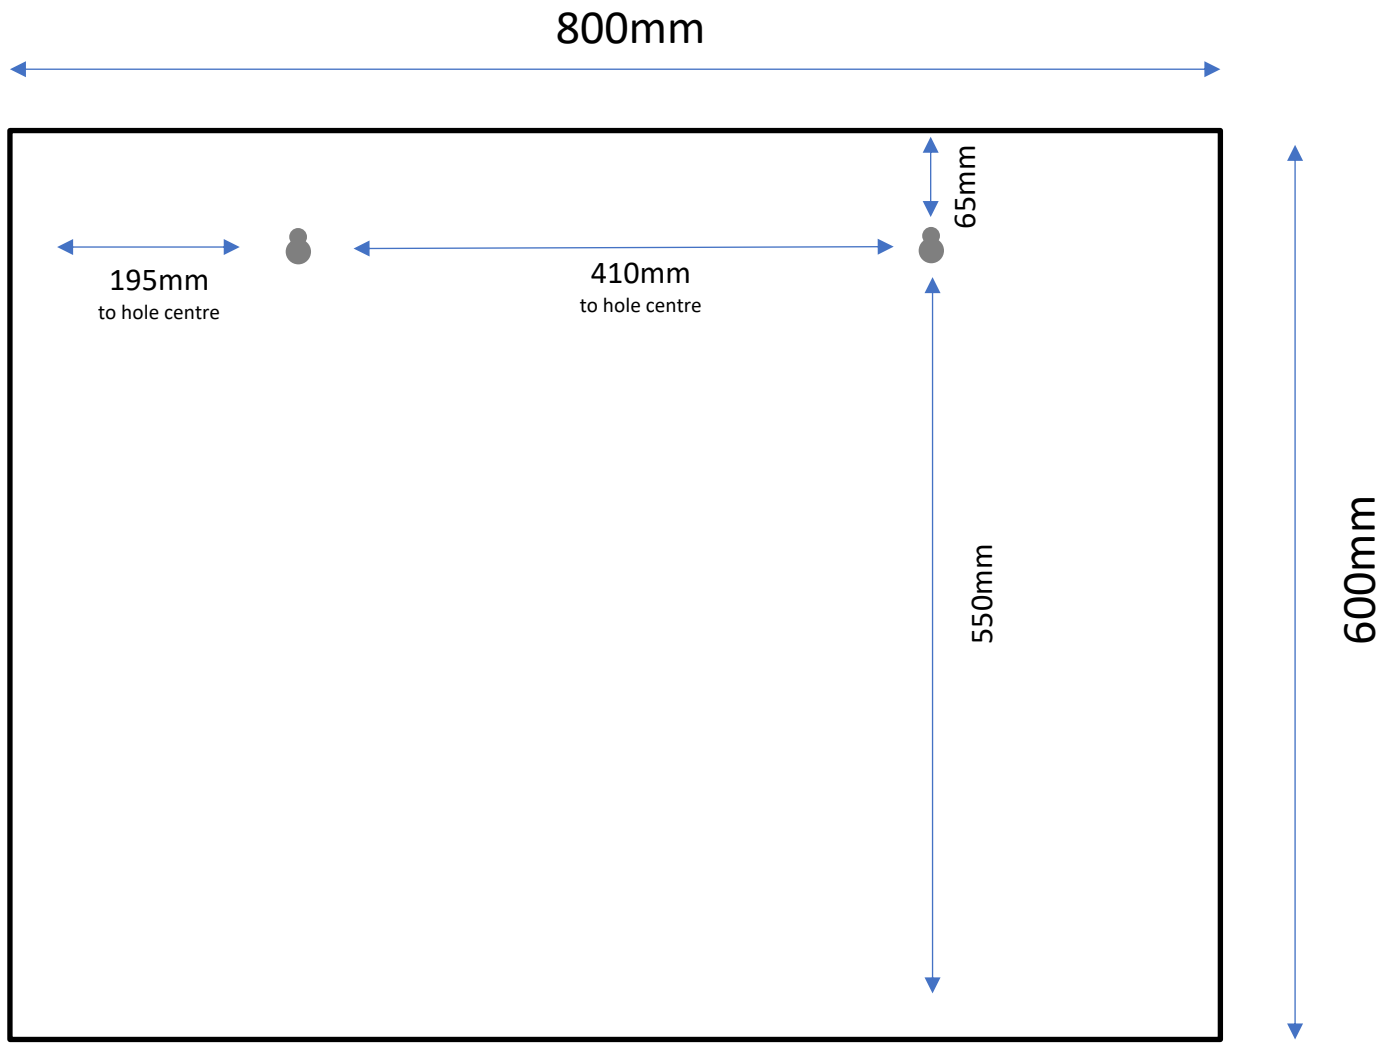

Noggin Positioning

65mm from top
550mm from base

● Mounting holes 13mm